

K-VT 2 ABGAENGE G-MINI

Manifolds

HANSA FLEX

Omadused


Sisendrõhk 0 - 9 bar

Aine temperatuur max. 70 °C

Keskonnatemperatuur Max. 70 °C

Korpus Die-cast aluminium

Muud andmed User manual on request

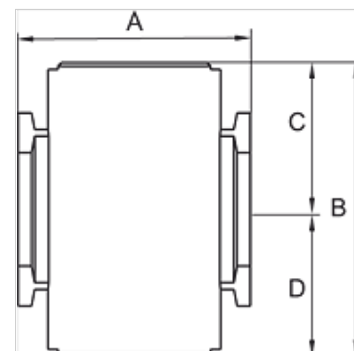

Artikkel

Märgistus	Keere	A (mm)	B	C (mm)	D (mm)	Ehitussuurus
K- 07 25 12 31	G 1/8	28,5	36,0 mm	18,0	18,0	200
K- 07 25 12 32	G 1/4	28,5	36,0 mm	18,0	18,0	200

Lisatarvikud

K-VERBINDUNGELEMENTE Connecting sets

K-WANDHALTER Wall bracket