


K-VT 2 ABGAENGE G-MINI

Manifolds

HANSA FLEX

Omadused

Sisendrõhk	0 - 9 bar
Aine temperatuur	max. 70 °C
Keskonnatemperatuur	Max. 70 °C
Korpus	Die-cast aluminium
Muud andmed	User manual on request

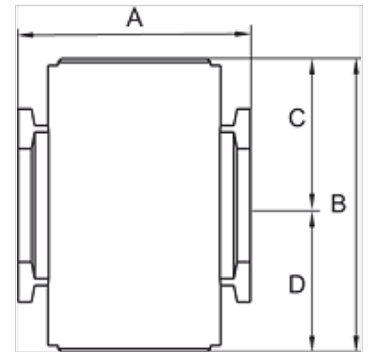

Artikkel

Märgistus	Keere	A (mm)	B	C (mm)	D (mm)	Ehitussuurus
K- 07 25 12 31	G 1/8	28,5	36,0 mm	18,0	18,0	200
K- 07 25 12 32	G 1/4	28,5	36,0 mm	18,0	18,0	200

Lisatarvikud

K-VERBINDUNGELEMENTE	Connecting sets
K-WANDHALTER	Wall bracket