


# K-T-RED VERBINDER POM

Union tees, unequal

**HANSA FLEX**

## Omadused

|                         |   |
|-------------------------|---|
| <b>Töörõhk</b>          | 0 - 16 bar (4 - 8 mm); 0 - 10 bar (10 - 28 mm)    |
| <b>Töötemperatuur</b>   | -20 °C to +70 °C in air; +1 °C to +70 °C in water |
| <b>Materjal</b>         | Acetalpolymerisat (POM)                           |
| <b>Tihendusmaterjal</b> | NBR   |

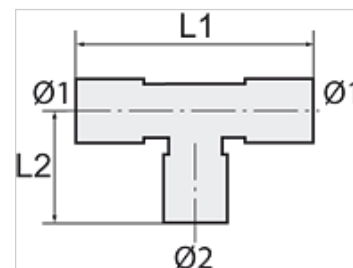

## Vihje

Lisaandmed saate soovi korral.

## Kirjeldus

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

## Artikkel

| Märgistus      | vooliku välise Ø1 jaoks<br>(mm) | vooliku välise Ø2 jaoks<br>(mm) | L1<br>(mm) | L2<br>(mm) |
|----------------|---------------------------------|---------------------------------|------------|------------|
| K- 07 40 28 74 | 18                              | 15                              | 87,0       | 40,0       |
| K- 07 40 28 75 | 22                              | 15                              | 90,0       | 42,0       |