
K-T-RED VERBINDER POM

Union tees, unequal

Omadused

Tööröhk	0 - 16 bar (4 - 8 mm); 0 - 10 bar (10 - 28 mm)
Töötemperatuur	-20 °C to +70 °C in air; +1 °C to +70 °C in water
Materjal	Acetalpolymerisat (POM)
Tihendusmaterjal	NBR



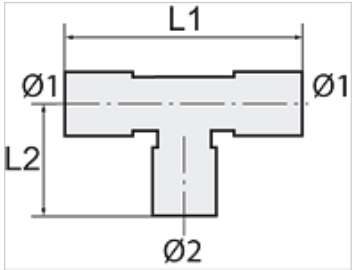

Vihje

Lisaandmed saate soovi korral.

Kirjeldus

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

Artikkel

Märgistus	vooliku välise Ø1 jaoks (mm)	vooliku välise Ø2 jaoks (mm)	L1 (mm)	L2 (mm)
K- 07 40 28 74	18	15	87,0	40,0
K- 07 40 28 75	22	15	90,0	42,0

Vaatamata põhjalikule kontrollile ei saa me vigade esinemist välistada ning ei vastuta olemasolevate andmete eest.