


K-MV G (NC) D 24 V DC STA

Normally closed, (NC), directly operated, 24 V DC, standard type

HANSA FLEX

Omadused

| | |
|--------------------------|---|
| Elektriühendus | device socket type A in acc. with ISO 4400 for all valves with threads G 3/8 & G 1/2, except valves type 3 & 4. Device socket |
| Keerme kirjeldus | G thread acc. DIN EN ISO 228-1 |
| Aine temperatuur | max. 80 °C when using water or oils; max. 90 °C when using with air |
| Kaitse tüüp | IP 65 |
| max töö rõhk | 10 bar |
| Tihendusmaterjal | FPM |
| Korpus, klapipesa | Stainless steel 1.4301 |
| Sisedetail | Stainless steel |

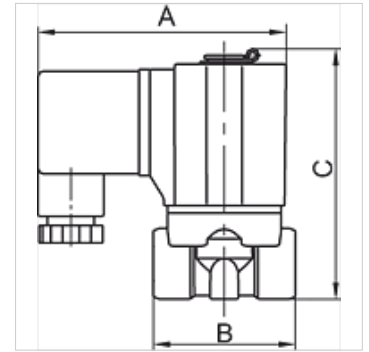

Vihje

Lisaandmed saate soovi korral.

Kirjeldus

Standard series in two different versions: Directly operated, Pilot-operated

Artikkel

| Märgistus | Keere | NW | A (mm) | B (mm) | C (mm) | Ehitustüüp |
|----------------|-------|-----|-----------|-----------|-----------|------------|
| K- 07 30 01 20 | G 1/8 | 3,0 | 70,0 | 40,0 | 70,7 | 1 |
| K- 07 30 01 21 | G 1/4 | 3,0 | 70,0 | 40,0 | 70,7 | 1 |
| K- 07 30 01 22 | G 3/8 | 5,0 | 85,0 | 52,0 | 87,0 | 1 |
| K- 07 30 01 23 | G 1/2 | 5,0 | 85,0 | 52,0 | 87,0 | 1 |