


# K-RD NIPPEL AGRK IGR MS NI

Reducing nipples, conical male thread, parallel female thread - nickel-plated brass

**HANSA FLEX**

## Omadused

|                |                    |
|----------------|--------------------|
| Töötemperatuur | Max. 150 °C        |
| Surve          | Max. 60 bar        |
| Materjal       | Nikeldatud messing |

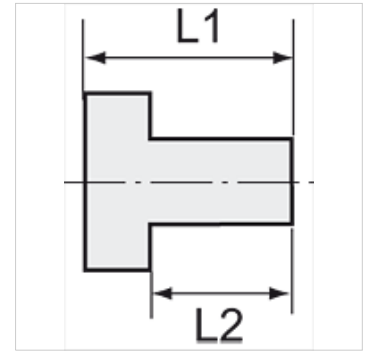

## Vihje

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes. Lisaandmed saate soovi korral.

## Kirjeldus

Suitable for air, water, oil, steam, etc.

## Lisateave

Further types and dimensions on request.

## Artikkel

| Märgistus      | Väliskeere | Sisekeere | L1 (mm) | L2 (mm) | SW    |
|----------------|------------|-----------|---------|---------|-------|
| K- 07 40 15 66 | R 1/4      | G 1/8     | 16,0    | 11,0    | 14 mm |
| K- 07 40 15 67 | R 3/8      | G 1/8     | 17,0    | 11,5    | 17 mm |
| K- 07 40 15 68 | R 3/8      | G 1/4     | 17,0    | 11,5    | 17 mm |
| K- 07 40 15 69 | R 1/2      | G 1/8     | 19,5    | 14,0    | 22 mm |
| K- 07 40 15 70 | R 1/2      | G 1/4     | 20,0    | 14,0    | 22 mm |
| K- 07 40 15 71 | R 1/2      | G 3/8     | 20,0    | 14,0    | 22 mm |
| K- 07 40 15 72 | R 3/4      | G 3/8     | 23,0    | 16,5    | 27 mm |
| K- 07 40 15 73 | R 3/4      | G 1/2     | 23,0    | 16,5    | 27 mm |
| K- 07 40 15 74 | R 1        | G 1/2     | 25,0    | 16,0    | 34 mm |
| K- 07 40 15 75 | R 1        | G 3/4     | 25,0    | 18,0    | 34 mm |