



# K-WV 5/2 EINS ELEKTRO

5/2-way spool valves, single solenoid

**HANSA FLEX**

## Omadused

<b>Funktsioon</b>	5/2-way
<b>Töörõhk</b>	2.5 - 10 bar; Max. vacuum 10 bar (external pilot air)
<b>min töörõhk</b>	2,5 bar
<b>Temperatuuri ulatus</b>	-10 °C to +60 °C
<b>Läbivool 6 bar ja 10 bar</b>	1500 NI/min (G 1/4), 4600 NI/min (G 1/2)
<b>Elektriühendus</b>	Coupler plug PG 9 - form B
<b>Kaitse tüüp</b>	IP 65 (DIN 46244)
<b>Korpus</b>	Anodised aluminium, blue
<b>Kolbsiiber</b>	Stainless steel
<b>Tihendusmaterjal</b>	NBR

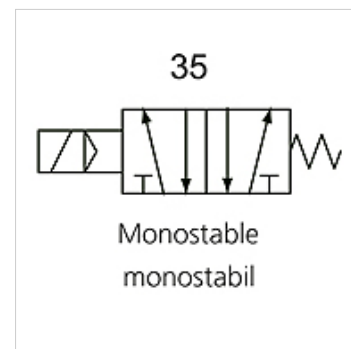

## Vihje

Lisaandmed saate soovi korral.

## Kirjeldus

This valve design, featuring the Tapered Tee Seal®, offers the ability to run without lubrication and supports almost any compressed air quality. The valves are largely resistant to dirt and can thus also be used under extreme conditions without any problems. Leakage is now a thing of the past and the spool no longer sticks, even after long idle periods.

## Artikkel

Märgistus	Ühendus	Pinge	DN	Lülituspildi number	Juhtimine
K- 07 15 02 21	G 1/4	24 V DC	8	35	
K- 07 15 02 22	G 1/2"	24 V DC	15	35	
K- 07 15 02 23	G 1/4	230 V AC, 50 Hz	8	35	
K- 07 15 02 24	G 1/2"	230 V AC, 50 Hz	15	35	