


# K-PRAEZIONS STEUERREGLER

Precision pilot regulators (feedback)

**HANSA FLEX**

## Omadused

|                     |                       |
|---------------------|-----------------------|
| Sisendrõhk          | Max. 16 bar           |
| Aine temperatuur    | max. 80 °C            |
| Keskonnatemperatuur | Max. 80 °C            |
| Manomeetri ühendus  | For feedback pressure |
| Tihendusmaterjal    | FKM                   |
| Korpus              | Die-cast zinc         |
| Membraan            | FKM                   |
| Sisemine õhutarve   | 3 to 6 l/min          |

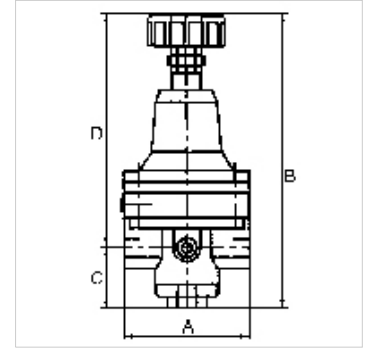

## Vihje

Lisaandmed saate soovi korral.

## Kirjeldus

Diaphragm pressure regulator for feedback systems, specially designed for use in a pneumatically controlled closed control loop in combination with a pressure regulator with pneumatic remote control, e.g. our Art. Nos. K-07250505 to K-07250510.

## Artikkel

| Märgistus      | Keere | Reguleerimisvahemik | A<br>(mm) | B        | C<br>(mm) | D<br>(mm) |
|----------------|-------|---------------------|-----------|----------|-----------|-----------|
| K- 07 25 05 11 | G 1/4 | 0.2 - 7 bar         | 82,0      | 142,8 mm | 19,4      | 123,4     |

## Lisatarvikud

|                          |        |
|--------------------------|--------|
| K-HALTERBAUSATZ STANDARD | Holder |
|--------------------------|--------|