


K-KOMP ZYL DOPPELW IG

Compact cylinders, double-acting (with magnet), non-cushioned, female piston rod

HANSA FLEX

Omadused

Vahendid	Filtered, unlubricated or lubricated compressed air. If lubrication is used, it must be continuous.
Töörõhk	Max. 10 bar
Rõhk	0,6 bar (Ø 20 bis Ø 32), 0,4 bar (Ø 40 bis Ø 100)
Temperatuuri ulatus	-10 °C to +60 °C (Ø 20 to Ø 63) -10 °C to +80 °C (Ø 80 bis Ø 100)
Kolvivarras	C45 steel, hard chrome-plated
Toru	Anodised aluminium jacket with T-slots
Kolb	POM (Ø 20 to Ø 63); Aluminium (Ø 80 to Ø 100)
Tihendusmaterjal	NBR

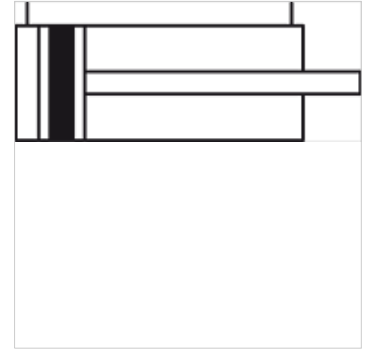

Vihje

Lisaandmed saate soovi korral.

Kirjeldus

New series acc. to ISO 21287 characterised by a very short and compact design. The standard type features a magnetic piston. Piston rod optionally with male or female thread.

Artikkel

Märgistus	Kolbide Ø	Keskpunkt (mm)	Ühendus	Kolvivarda sisekeere
K- 07 15 08 87	20 mm	5	M 5	M 6
K- 07 15 08 88	20 mm	10	M 5	M 6
K- 07 15 08 89	20 mm	15	M 5	M 6
K- 07 15 08 90	20 mm	20	M 5	M 6
K- 07 15 08 91	20 mm	25	M 5	M 6
K- 07 15 08 92	20 mm	30	M 5	M 6
K- 07 15 08 93	20 mm	40	M 5	M 6
K- 07 15 08 94	20 mm	50	M 5	M 6
K- 07 15 08 95	20 mm	60	M 5	M 6
K- 07 15 08 96	25 mm	5	M 5	M 6
K- 07 15 08 97	25 mm	10	M 5	M 6
K- 07 15 08 98	25 mm	15	M 5	M 6
K- 07 15 08 99	25 mm	20	M 5	M 6
K- 07 15 09 00	25 mm	25	M 5	M 6
K- 07 15 09 01	25 mm	30	M 5	M 6
K- 07 15 09 02	25 mm	40	M 5	M 6
K- 07 15 09 03	25 mm	50	M 5	M 6
K- 07 15 09 04	25 mm	60	M 5	M 6
K- 07 15 09 05	32 mm	5	G 1/8	M 8
K- 07 15 09 06	32 mm	10	G 1/8	M 8
K- 07 15 09 07	32 mm	15	G 1/8	M 8
K- 07 15 09 08	32 mm	20	G 1/8	M 8
K- 07 15 09 09	32 mm	25	G 1/8	M 8
K- 07 15 09 10	32 mm	30	G 1/8	M 8
K- 07 15 09 11	32 mm	40	G 1/8	M 8
K- 07 15 09 12	32 mm	50	G 1/8	M 8
K- 07 15 09 13	32 mm	60	G 1/8	M 8
K- 07 15 09 14	32 mm	80	G 1/8	M 8
K- 07 15 09 15	40 mm	5	G 1/8	M 8
K- 07 15 09 16	40 mm	10	G 1/8	M 8
K- 07 15 09 17	40 mm	15	G 1/8	M 8
K- 07 15 09 18	40 mm	20	G 1/8	M 8
K- 07 15 09 19	40 mm	25	G 1/8	M 8
K- 07 15 09 20	40 mm	30	G 1/8	M 8
K- 07 15 09 21	40 mm	40	G 1/8	M 8
K- 07 15 09 22	40 mm	50	G 1/8	M 8
K- 07 15 09 23	40 mm	60	G 1/8	M 8
K- 07 15 09 24	40 mm	80	G 1/8	M 8
K- 07 15 09 25	50 mm	5	G 1/8	M 10



Vaatamata põhjalikule kontrollile ei saa me vigade esinemist välistada ning ei vastuta olemasolevate andmete eest.

23.07.2024

HANSA-FLEX AG

www.hansa-flex.com

1

K-KOMP ZYL DOPPELW IG

Compact cylinders, double-acting (with magnet), non-cushioned, female piston rod



Artikkel				
Märgistus	Kolbide Ø	Keskpunkt (mm)	Ühendus	Kolvivarda sisekeere
K- 07 15 09 26	50 mm	10	G 1/8	M 10
K- 07 15 09 27	50 mm	15	G 1/8	M 10
K- 07 15 09 28	50 mm	20	G 1/8	M 10
K- 07 15 09 29	50 mm	25	G 1/8	M 10
K- 07 15 09 30	50 mm	30	G 1/8	M 10
K- 07 15 09 31	50 mm	40	G 1/8	M 10
K- 07 15 09 32	50 mm	50	G 1/8	M 10
K- 07 15 09 33	50 mm	60	G 1/8	M 10
K- 07 15 09 34	50 mm	80	G 1/8	M 10
K- 07 15 09 35	63 mm	5	G 1/8	M 10
K- 07 15 09 36	63 mm	10	G 1/8	M 10
K- 07 15 09 37	63 mm	15	G 1/8	M 10
K- 07 15 09 38	63 mm	20	G 1/8	M 10
K- 07 15 09 39	63 mm	25	G 1/8	M 10
K- 07 15 09 40	63 mm	30	G 1/8	M 10
K- 07 15 09 41	63 mm	40	G 1/8	M 10
K- 07 15 09 42	63 mm	50	G 1/8	M 10
K- 07 15 09 43	63 mm	60	G 1/8	M 10
K- 07 15 09 44	63 mm	80	G 1/8	M 10
K- 07 15 09 45	80 mm	5	G 1/8	M 12
K- 07 15 09 46	80 mm	10	G 1/8	M 12
K- 07 15 09 47	80 mm	15	G 1/8	M 12
K- 07 15 09 48	80 mm	20	G 1/8	M 12
K- 07 15 09 49	80 mm	25	G 1/8	M 12
K- 07 15 09 50	80 mm	30	G 1/8	M 12
K- 07 15 09 51	80 mm	40	G 1/8	M 12
K- 07 15 09 52	80 mm	50	G 1/8	M 12
K- 07 15 09 53	80 mm	60	G 1/8	M 12
K- 07 15 09 54	80 mm	80	G 1/8	M 12
K- 07 15 08 77	100 mm	5	G 1/8	M 12
K- 07 15 08 78	100 mm	10	G 1/8	M 12
K- 07 15 08 79	100 mm	15	G 1/8	M 12
K- 07 15 08 80	100 mm	20	G 1/8	M 12
K- 07 15 08 81	100 mm	25	G 1/8	M 12
K- 07 15 08 82	100 mm	30	G 1/8	M 12
K- 07 15 08 83	100 mm	40	G 1/8	M 12
K- 07 15 08 84	100 mm	50	G 1/8	M 12
K- 07 15 08 85	100 mm	60	G 1/8	M 12
K- 07 15 08 86	100 mm	80	G 1/8	M 12