


K-DVST OHNE REGLER

Pressure booster without regulator

HANSA FLEX

| | |
|----------------------------|---|
| Omadused | |
| Sisendrõhk | 2 - 10 bar |
| Väljundrõhk | Max. 20 bar (regulated: max. 16 bar) |
| Temperatuuri ulatus | -10 °C to +50 °C (40 mm bore), -10 °C to +60 °C (63 mm bore) |
| Vahendid | Filtered, unlubricated or lubricated compressed air (if lubrication is used, it must be continuous) |
| Tihendusmaterjal | NBR |
| Rõhuregulaator | With plastic body |
| Korpus | Aluminium, anodised |
| Toru | Anodised aluminium jacket |
| Montaaž | Any position, with 4 mounting holes |
| P2:P1 | 2:1 |

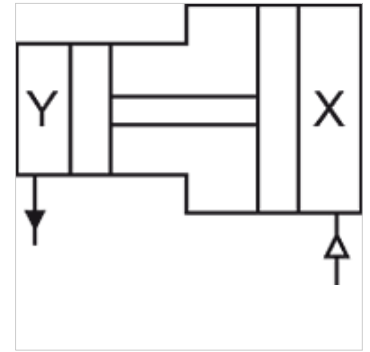

Vihje

For information about calculating the filling times for different tank sizes, refer to the above-mentioned data sheet available on our website
Lisaandmed saate soovi korral.

Kirjeldus

Pressure multipliers (boosters) allow a separate compressed air store with up to double pressure to be installed for selected devices in a compressed air system without an external energy source, i.e. it is possible to work with a maximum pressure of 20 bar in a standard 10 bar system (maximum ratio 2:1). This is achieved using a double piston, which is operated by a combination of integrated check valves in such a way that the booster works automatically until the target pressure is reached in a compressed air tank and is then automatically switched off. A tank is always required to build up the pressure and store the compressed air!

Lisateave

Fixing bracket with nut

Artikkel

| Märgistus | Ühendus | Kolbide Ø (mm) | H (mm) | L (mm) |
|----------------|---------|-------------------|-----------|-----------|
| K- 07 25 08 64 | G 1/8 | 40,0 | 64,0 | 194,0 |
| K- 07 25 08 66 | G 3/8 | 63,0 | 98,0 | 290,0 |

Lisatarvikud

K-ZUBEH ERSATZ LUFT BOOSTER Accessories / spare parts for Air-air-multiplier (booster)