


# K-DRV ABLD RAENDEL DREH OR

Unidirectional flow control valves with outgoing air restriction, adjustable with knurled screw, angled, swivel type, parallel male thread with O-ring

**HANSA FLEX**

<b>Omadused</b>	
<b>Töörõhk</b>	Max. 15 bar, coarse vacuum
<b>Rakendusvaldkond</b>	Air, vacuum
<b>soovitatud voolikud</b>	PU or PA (nylon)
<b>Vahendid</b>	Compressed air and all gases or liquids that are compatible with the materials
<b>Temperatuuri ulatus</b>	-20 °C to +80 °C
<b>Tihenduspid</b>	Parallel version: O-ring in housing, Conical version: thread coating
<b>Materjal</b>	Plastic, Nickel plated brass
<b>Surverõngas</b>	Plastic

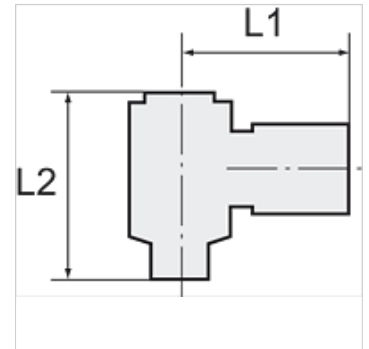

## Vihje

Lisaandmed saate soovi korral.

## Kirjeldus

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

## Artikkel

Märgistus	Keere	vooliku välimise-Ø jaoks (mm)	L1 (mm)	L2 min (mm)	L2 max (mm)	SW
K- 07 40 07 56	M 5	4 mm	20,0	29,0	31,9	8 mm
K- 07 40 07 57	M 5	6 mm	21,7	29,0	31,9	8 mm
K- 07 40 07 67	G 1/8	4 mm	22,3	37,8	44,0	10 mm
K- 07 40 07 68	G 1/8	6 mm	22,9	37,8	44,0	10 mm
K- 07 40 07 69	G 1/8	8 mm	25,3	37,8	44,0	10 mm
K- 07 40 07 66	G 1/8	10 mm	30,1	37,8	44,0	10 mm
K- 07 40 07 63	G 1/4	4 mm	24,0	44,0	51,0	14 mm
K- 07 40 07 64	G 1/4	6 mm	24,9	44,0	51,0	14 mm
K- 07 40 07 65	G 1/4	8 mm	28,4	44,0	51,0	14 mm
K- 07 40 07 61	G 1/4	10 mm	32,0	44,0	51,0	14 mm
K- 07 40 07 62	G 1/4	12 mm	32,0	44,0	51,0	14 mm
K- 07 40 07 72	G 3/8	8 mm	29,3	48,7	55,0	19 mm
K- 07 40 07 70	G 3/8	10 mm	32,5	48,7	55,0	19 mm
K- 07 40 07 71	G 3/8	12 mm	35,3	48,7	55,0	19 mm
K- 07 40 07 60	G 1/2	8 mm	32,3	53,0	59,2	24 mm
K- 07 40 07 58	G 1/2	10 mm	35,5	53,0	59,2	24 mm
K- 07 40 07 59	G 1/2	12 mm	36,3	53,0	59,2	24 mm