


K-RD DURCHGANGSFORM LEI VA

Check valve - straight-way type, lightweight series, stainless steel

HANSA FLEX

Omadused

Töörõhk	2 - 16 bar
Töötemperatuur	-20 °C to +150 °C
Avamissurve	min. 0.03 bar
Tihendusmaterjal	FKM
Vedru	Stainless steel 1.4301
Korpus	Stainless steel 1.4301

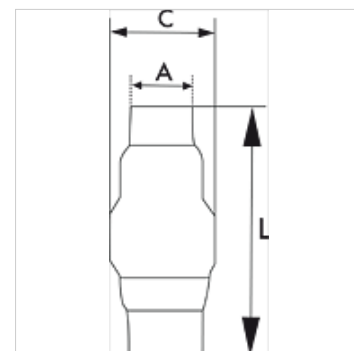

Vihje

Lisaandmed saate soovi korral.

Kirjeldus

Stainless steel check valve with full bore and very low opening pressure, no maintenance required. Applications: Compressed air, water, neutral gases, gaseous and liquid non-corrosive media, oils.

Artikkel

Märgistus	Keere	A (mm)	C (mm)	L (mm)
K- 07 30 29 23	G 1/4	20,0	32,0	55,9
K- 07 30 29 28	G 3/8	20,0	32,0	56,0
K- 07 30 29 22	G 1/2	25,0	32,0	55,6
K- 07 30 29 27	G 3/4	29,0	44,0	66,7
K- 07 30 29 19	G 1	36,0	53,0	83,6
K- 07 30 29 21	G 1 1/4	45,0	62,0	96,0
K- 07 30 29 20	G 1 1/2	51,0	78,0	114,0
K- 07 30 29 24	G 2	64,0	89,0	120,5
K- 07 30 29 25	G 2 1/2	80,0	113,0	141,5
K- 07 30 29 26	G 3	94,0	132,0	160,0