


# K-RD DURCHGANGSFORM LEI VA

Check valve - straight-way type, lightweight series, stainless steel

**HANSA FLEX**

## Omadused

Töörõhk	2 - 16 bar
Töötemperatuur	-20 °C to +150 °C
Avamissurve	min. 0.03 bar
Tihendusmaterjal	FKM
Vedru	Stainless steel 1.4301
Korpus	Stainless steel 1.4301

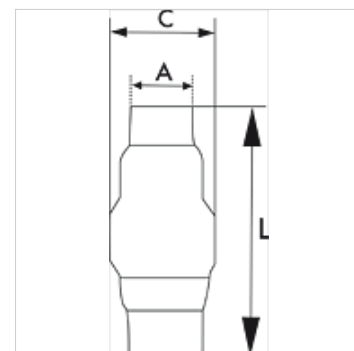

## Vihje

Lisaandmed saate soovi korral.

## Kirjeldus

Stainless steel check valve with full bore and very low opening pressure, no maintenance required. Applications: Compressed air, water, neutral gases, gaseous and liquid non-corrosive media, oils.

## Artikkel

Märgistus	Keere	A (mm)	C (mm)	L (mm)
K- 07 30 29 23	G 1/4	20,0	32,0	55,9
K- 07 30 29 28	G 3/8	20,0	32,0	56,0
K- 07 30 29 22	G 1/2	25,0	32,0	55,6
K- 07 30 29 27	G 3/4	29,0	44,0	66,7
K- 07 30 29 19	G 1	36,0	53,0	83,6
K- 07 30 29 21	G 1 1/4	45,0	62,0	96,0
K- 07 30 29 20	G 1 1/2	51,0	78,0	114,0
K- 07 30 29 24	G 2	64,0	89,0	120,5
K- 07 30 29 25	G 2 1/2	80,0	113,0	141,5
K- 07 30 29 26	G 3	94,0	132,0	160,0