


# K-WTEH SERIE ONE O DRS

Service units, »ONE« Series, without pressure switch

**HANSA FLEX**

## Omadused

|                                |                                   |
|--------------------------------|-----------------------------------|
| Sisendrõhk                     | Max. 10 bar                       |
| Temperatuuri ulatus            | -10 °C to +50 °C                  |
| Vahendid                       | Suruõhk                           |
| Kaitse tüüp                    | IP 65                             |
| Töörõhk                        | 0.5 - 8 bar                       |
| Rõhulüliti                     | Changeover contact                |
| Filteerilemendi pooride suurus | 20 µm                             |
| Läbivoolu väärtuse määramine   | At 6,3 bar and $\Delta p = 1$ bar |

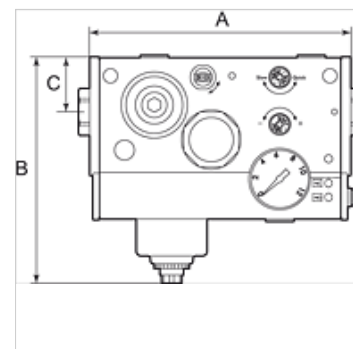

## Vihje

Lisaandmed saate soovi korral.

## Kirjeldus

Multifunctional service unit with 6 or 7 functions in a single device: 3/2-way valve (manually operated), filter with automatic drain valve, air ports, pressure regulator, pressure gauge, soft start valve and optional: pressure switch. This combination of extremely good flow rates and a wide range of functions integrated in a single, compact unit saves valuable space and is unmatched by any similar product available in the market! Soft starting independently of the load and easy replacement of the filter cartridge under pressure are just two of the other outstanding features of this amazing device.

## Tellimisinfo

This unit can also be supplied with many other combinations of functions and port sizes. We will be pleased to make you an offer to match your individual specification on request!

## Artikkel

| Märgistus      | Ühendus | Läbivool<br>(L/min) | A<br>(mm) | B        | C<br>(mm) | Pinge                                    |
|----------------|---------|---------------------|-----------|----------|-----------|--|
| K- 07 25 13 79 | G 1/4   | 2400                | 165,5     | 144,0 mm | 35,0      | 24 V DC (for valves and pressure switch) |
| K- 07 25 13 80 | G 3/8   | 3300                | 165,5     | 144,0 mm | 35,0      | 24 V DC (for valves and pressure switch) |
| K- 07 25 13 81 | G 1/2"  | 4000                | 165,5     | 144,0 mm | 35,0      | 24 V DC (for valves and pressure switch) |