
K-WTEH SERIE ONE O DRS

Service units, »ONE« Series, without pressure switch

Omadused

Sisendrõhk	Max. 10 bar
Temperatuuri ulatus	-10 °C to +50 °C
Vahendid	Suruõhk
Kaitse tüüp	IP 65
Töörõhk	0.5 - 8 bar
Rõhulüliti	Changeover contact
Filterelemendi pooride suurus	20 µm
Läbivoolu väärtuse mõõtmine	At 6,3 bar and Δp = 1 bar



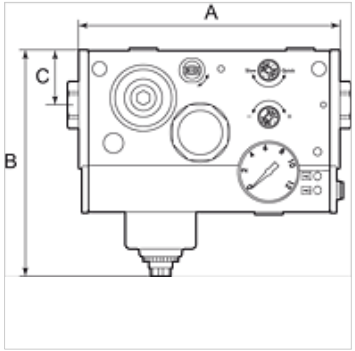

Vihje

Lisaandmed saate soovi korral.

Kirjeldus

Multifunctional service unit with 6 or 7 functions in a single device: 3/2-way valve (manually operated), filter with automatic drain valve, air ports, pressure regulator, pressure gauge, soft start valve and optional: pressure switch. This combination of extremely good flow rates and a wide range of functions integrated in a single, compact unit saves valuable space and is unmatched by any similar product available in the market! Soft starting independently of the load and easy replacement of the filter cartridge under pressure are just two of the other outstanding features of this amazing device.

Tellimisinfo

This unit can also be supplied with many other combinations of functions and port sizes. We will be pleased to make you an offer to match your individual specification on request!

Artikkel

Märgistus	Ühendus	Läbivool (L/min)	A (mm)	B	C (mm)	Pinge
K- 07 25 13 79	G 1/4	2400	165,5	144,0 mm	35,0	24 V DC (for valves and pressure switch)
K- 07 25 13 80	G 3/8	3300	165,5	144,0 mm	35,0	24 V DC (for valves and pressure switch)
K- 07 25 13 81	G 1/2"	4000	165,5	144,0 mm	35,0	24 V DC (for valves and pressure switch)

Vaatamata põhjalikule kontrollile ei saa me vigade esinemist välistada ning ei vastuta olemasolevate andmete eest.