

K-VSTO POM
Plugs

Omadused

Tööröhk	0 - 16 bar (4 - 8 mm); 0 - 10 bar (10 - 28 mm)
Töötemperatuur	-20 °C to +70 °C in air; +1 °C to +70 °C in water
Materjal	Acetalpolymerisat (POM)
Tihendusmaterjal	NBR



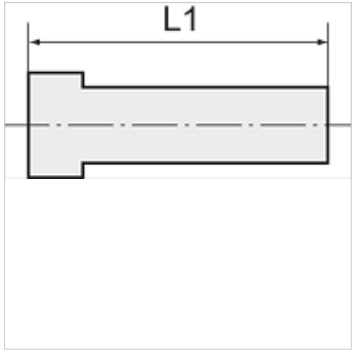

Vihje
Lisaandmed saate soovi korral.

Kirjeldus
Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

Artikkel

Märgistus	Värv	L1 (mm)	Liitmik (mm)
K- 07 40 29 11	punane	28,0	4
K- 07 40 29 12	punane	28,0	5
K- 07 40 29 13	punane	30,0	6
K- 07 40 29 14	punane	31,0	8
K- 07 40 29 15	punane	36,5	10
K- 07 40 29 16	punane	38,5	12
K- 07 40 29 17	must	45,0	15
K- 07 40 29 18	must	41,5	18
K- 07 40 29 19	must	45,0	22
K- 07 40 29 20	must	56,0	28

Vaatamata põhjalikule kontrollile ei saa me vigade esinemist välistada ning ei vastuta olemasolevate andmete eest.