K-RD STUECKE PP


Reducers

HANSA-FLEX

Omadused

Tööröhk	on request
Töötemperatuur	Max. +20 °C
Materjal	Polypropylene (PP)
Tihendusmaterjal	NBR



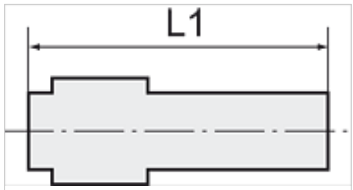

Vihje

Lisaandmed saate soovi korral.

Kirjeldus

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

Artikkel

Märgistus	vooliku välimise-Ø jaoks (mm)	L1 (mm)	Liitmik (mm)
K- 07 40 29 00	22 mm	127,0	32
K- 07 40 29 01	28 mm	133,3	32

Vaatamata põhjalikule kontrollile ei saa me vigade esinemist välistada ning ei vastuta olemasolevate andmete eest.