



K-SCHOTT-STECKVERB ABSP

Female bulkhead stop unions (pressure max. 10 bar)

HANSA FLEX

Omadused

Töö rõhk	Max. 10 bar, vacuum
Rakendusvaldkond	Air, vacuum
soovitatud voolikud	PU or PA (nylon)
Vahendid	Suruõhk
Tavaline	M thread acc. to DIN 13-1, with O-Ring
Temperatuuri ulatus	0 °C to +60 °C
Materjal	Plastic, Nickel plated brass
Surverõngas	Plastic

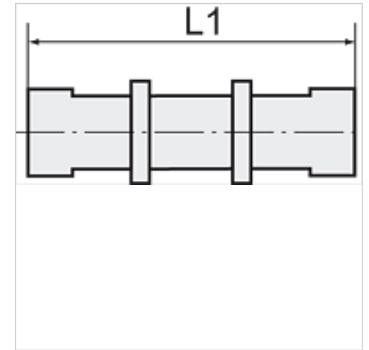

Vihje

Lisaandmed saate soovi korral.

Kirjeldus

The air supply is completely shut off as soon as the hose is disconnected from the union. The flow rate is only guaranteed if the hose is securely inserted.

Artikkel

Märgistus	Keere	vooliku välimise-Ø jaoks (mm)	L1 (mm)	SW
K- 07 40 43 74	M 12 x 1,5	4 mm	41,0	14 mm
K- 07 40 43 75	M 14 x 1,5	6 mm	44,5	17 mm
K- 07 40 43 76	M 16 x 1,5	8 mm	50,3	19 mm
K- 07 40 43 77	M 20 x 1,5	10 mm	58,5	24 mm
K- 07 40 43 78	M 24 x 1,5	12 mm	62,2	27 mm