



K-ODER-VENTIL

OR valves

HANSA FLEX

Omadused

Töörõhk	2 - 10 bar
Temperatuuri ulatus	-10 °C to +80 °C
Läbivool 6,3 bar ja Δ 1 bar juures	500 NI/min (G 1/8), 1300 NI/min (G 1/4)
Ventiilikorpus	Alumiinium
Kuul	Stainless steel
Tihendid	NBR

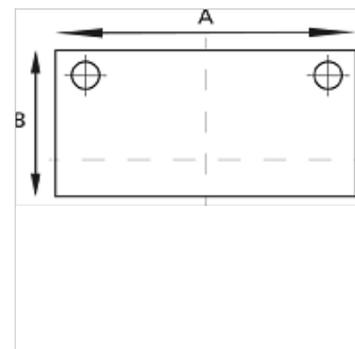

Vihje

Lisaandmed saate soovi korral.

Kirjeldus

The valve has two inlets and one outlet. A signal appears at the outlet when the left or right inlet is pressurised.
If the pressure at the two inlets is different, the stronger of the two signals appears at the outlet.

Artikkel

Märgistus	Keere	A (mm)	B (mm)
K- 07 15 26 05	3 x G 1/8	36,0	20,0
K- 07 15 26 04	3 x G 1/4	43,0	25,0