
# K-DV GEW B RAENDEL

Bidirectional flow control valves, air restriction at both ends (»B«), screw connection

## Omadused

| | |
|---|---|
| **Tööröhk** | max 10 baari |
| **Temperatuuri ulatus** | 0 °C to +70 °C |
| **Õõneskruvi, liigendvars, reguleerimiskruvi** | Nickel-plated brass |
| **Sisedetail** | Brass with a bare metal surface |
| **O-rõngas huultihend** | NBR |
| **Tihendid (kadumatu)** | Polyamide (glass fibre-reinforced) |



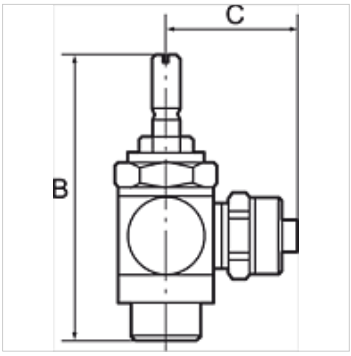


## Vihje

Lisaandmed saate soovi korral.

## Kirjeldus

For regulation of a cylinder piston speed at both ends and control of flow rates. Designed as a banjo-type valve with a hollow bolt and ring piece for mounting directly. <br>On the version with a knurled screw, the set volumetric flow rate can be locked with the hexagon nut to obtain a fixed setting.

## Artikkel

| Märgistus | Ühendus | C (mm) | Keere | SW | B (mm) |
|---|---|---|---|---|---|
| **K- 07 15 25 16** | M 5 female thread | 11,5 | M 5 | 8 mm | 38,9 |
| **K- 07 15 04 97** | G 1/8 female thread | 16,0 | G 1/8 | 14 mm | 42,0 |
| **K- 07 15 04 93** | G 1/4 female thread | 22,0 | G 1/4 | 17 mm | 51,0 |
| **K- 07 15 25 17** | G 1/2 female thread | 32,0 | G 1/2 | 26 mm | 81,0 |
| **K- 07 15 25 18** | G 3/8 female thread | 26,0 | G 3/8 | 20 mm | 63,0 |

*Vaatamata põhjalikule kontrollile ei saa me vigade esinemist välistada ning ei vastuta olemasolevate andmete eest.*