



# K-STECKVERBINDU RED

Reducers

**HANSA FLEX**

## Omadused

Töörõhk	Max. 16 bar
Töötemperatuur	-20 °C to +150 °C
Materjal	Nikeldatud messing
Surverõngas	Nickel-plated brass
Pingutusrõngas	Stainless steel

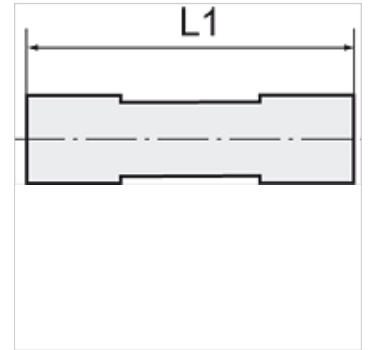

## Vihje

Lisaandmed saate soovi korral.

## Kirjeldus

Push-in fittings, manufactured entirely in nickel-plated brass. All parts with a parallel thread are supplied with an FPM O-ring. All parts with conical threads are coated with preCOTE 5 dispersion, all fittings in this series can thus also be used at high temperatures (medium compressed air).

## Artikkel

Märgistus	vooliku välimise-Ø jaoks (mm)	L1 (mm)
K- 07 40 47 75	6 mm / 4 mm	33,0
K- 07 40 47 76	8 mm / 6 mm	39,0
K- 07 40 47 77	10 mm / 8 mm	39,5
K- 07 40 47 78	12 mm / 10 mm	41,5