

K-SCHOTT-STECKVERB 3

Female bulkhead connectors

Omadused

Tööröhk	Max. 15 bar, coarse vacuum
Rakendusvaldkond	Air, vacuum
soovitatud voolikud	PU or PA (nylon)
Vahendid	Compressed air and all gases or liquids that are compatible with the materials
Temperatuuri ulatus	-20 °C to +80 °C
Materjal	Plastic, Nickel plated brass
Surverõngas	Plastic



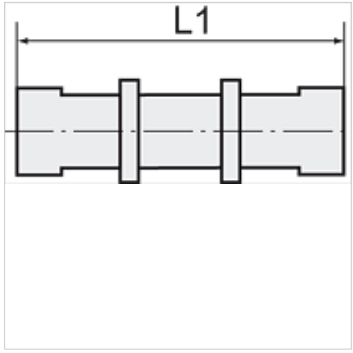

Vihje

Lisaandmed saate soovi korral.

Kirjeldus

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

Artikkel

Märgistus	vooliku välimise-Ø jaoks (mm)	Lülitustahvli keere	L1 (mm)	SW
K- 07 40 04 31	4 mm	M 12 x 1	31,1	14 mm
K- 07 40 04 32	6 mm	M 14 x 1	33,4	17 mm
K- 07 40 04 33	8 mm	M 16 x 1	37,7	19 mm
K- 07 40 04 34	10 mm	M 20 x 1	41,8	24 mm
K- 07 40 04 35	12 mm	M 22 x 1	46,7	27 mm
K- 07 40 04 36	16 mm	M 27 x 1	51,2	32 mm

Vaatamata põhjalikule kontrollile ei saa me vigade esinemist välistada ning ei vastuta olemasolevate andmete eest.