
# K-L-STECKVER DREH AG OR 2

Male elbows, swivel type, parallel male thread with O-ring

## Omadused

| | |
|---|---|
| **Tööröhk** | Max. 16 bar |
| **Töötemperatuur** | -20 °C to +150 °C |
| **Materjal** | Nikeldatud messing |
| **Surverõngas** | Nickel-plated brass |
| **O-rõngas** | FKM (FPM) |
| **Pingutusrõngas** | Stainless steel |



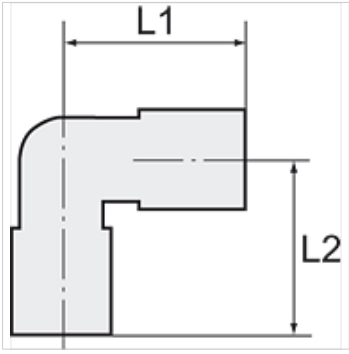


## Vihje

Lisaandmed saate soovi korral.

## Kirjeldus

Push-in fittings, manufactured entirely in nickel-plated brass. All parts with a parallel thread are supplied with an FPM O-ring.<br>All parts with conical threads are coated with preCOTE 5 dispersion, all fittings in this series can thus also be used at high temperatures (medium compressed air).

## Artikkel

| Märgistus | Keere | vooliku välimise-Ø jaoks (mm) | L1 (mm) | L2 (mm) | SW |
|---|---|---|---|---|---|
| **K- 07 40 27 65** | M 5 | 4 mm | 18,0 | 14,5 | 9 mm |
| **K- 07 40 27 66** | M 5 | 6 mm | 21,0 | 14,5 | 9 mm |
| **K- 07 40 27 72** | G 1/8 | 4 mm | 20,0 | 20,0 | 13 mm |
| **K- 07 40 27 73** | G 1/8 | 6 mm | 21,0 | 20,0 | 13 mm |
| **K- 07 40 27 74** | G 1/8 | 8 mm | 24,0 | 20,0 | 13 mm |
| **K- 07 40 27 69** | G 1/4 | 4 mm | 20,0 | 24,0 | 13 mm |
| **K- 07 40 27 70** | G 1/4 | 6 mm | 21,0 | 24,0 | 13 mm |
| **K- 07 40 27 71** | G 1/4 | 8 mm | 24,0 | 24,0 | 13 mm |
| **K- 07 40 27 68** | G 1/4 | 10 mm | 27,0 | 24,0 | 16 mm |
| **K- 07 40 47 86** | G 1/4 | 12 mm | 29,0 | 30,5 | 16 mm |
| **K- 07 40 27 76** | G 3/8 | 8 mm | 24,0 | 25,5 | 13 mm |
| **K- 07 40 27 75** | G 3/8 | 10 mm | 27,0 | 28,0 | 16 mm |
| **K- 07 40 47 85** | G 1/2 | 12 mm | 29,0 | 33,5 | 20 mm |
| **K- 07 40 27 67** | G 1/2 | 10 mm | 27,0 | 30,0 | 16 mm |
| **K- 07 40 47 87** | G 3/8 | 12 mm | 29,0 | 28,5 | 20 mm |

*Vaatamata põhjalikule kontrollile ei saa me vigade esinemist välistada ning ei vastuta olemasolevate andmete eest.*