
# K-STECKVERSCHR IG SK 1


Male connectors, parallel female thread with outer hex

HANSA-FLEX

## Omadused

| | |
|---|---|
| **Töörõhk** | Max. 16 bar |
| **Töötemperatuur** | -20 °C to +150 °C |
| **Materjal** | Nikeldatud messing |
| **Surverõngas** | Nickel-plated brass |
| **Pingutusrõngas** | Stainless steel |



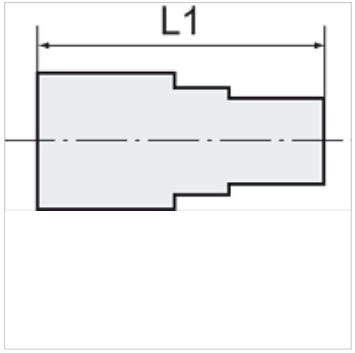


## Vihje

Lisaandmed saate soovi korral.

## Kirjeldus

Push-in fittings, manufactured entirely in nickel-plated brass. All parts with a parallel thread are supplied with an FPM O-ring.<br>All parts with conical threads are coated with preCOTE 5 dispersion, all fittings in this series can thus also be used at high temperatures (medium compressed air).

## Artikkel

| Märgistus | Keere | vooliku välimise-Ø jaoks (mm) | L1 (mm) | SW |
|---|---|---|---|---|
| **K- 07 40 27 46** | G 1/8 | 4 mm | 26,5 | 9 mm |
| **K- 07 40 27 47** | G 1/8 | 6 mm | 27,0 | 11 mm |
| **K- 07 40 27 48** | G 1/8 | 8 mm | 28,0 | 13 mm |
| **K- 07 40 47 71** | G 1/4 | 4 mm | 29,5 | 9 mm |
| **K- 07 40 27 44** | G 1/4 | 6 mm | 31,0 | 11 mm |
| **K- 07 40 27 45** | G 1/4 | 8 mm | 32,0 | 13 mm |
| **K- 07 40 27 43** | G 1/4 | 10 mm | 32,0 | 16 mm |
| **K- 07 40 47 70** | G 1/4 | 12 mm | 40,0 | 20 mm |
| **K- 07 40 47 72** | G 3/8 | 10 mm | 37,5 | 20 mm |
| **K- 07 40 47 73** | G 3/8 | 12 mm | 39,5 | 20 mm |

*Vaatamata põhjalikule kontrollile ei saa me vigade esinemist välistada ning ei vastuta olemasolevate andmete eest.*