
# K-T-STECK VB 3

Union tees

## Omadused

| | |
|---|---|
| **Tööröhk** | Max. 16 bar |
| **Töötemperatuur** | -20 °C to +80 °C |
| **Materjal** | Nikeldatud messing |
| **Surverõngas** | Hostaform |
| **Pingutusrõngas** | Stainless steel |



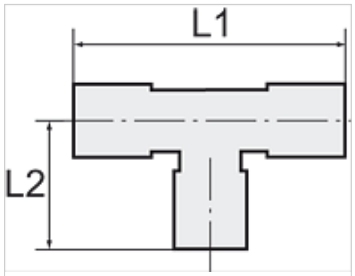


## Vihje

Lisaandmed saate soovi korral.

## Kirjeldus

The advanced version of our highly successful push-in fittings series manufactured in nickel-plated brass. Advantages of this new, optimised series: Much easier connection and disconnection of the hose, even with repeated mounting, can also be used for non-calibrated hoses, suitable for vacuum operation.

## Artikkel

| Märgistus | vooliku välimise-Ø jaoks (mm) | L1 (mm) | L2 (mm) |
|---|---|---|---|
| **K- 07 40 25 42** | 3 mm | 21,2 | 10,4 |
| **K- 07 40 25 43** | 4 mm | 33,4 | 16,7 |
| **K- 07 40 25 44** | 5 mm | 38,4 | 19,2 |
| **K- 07 40 25 45** | 6 mm | 38,0 | 19,0 |
| **K- 07 40 25 46** | 8 mm | 42,6 | 21,3 |
| **K- 07 40 25 47** | 10 mm | 46,6 | 23,3 |
| **K- 07 40 25 48** | 12 mm | 52,0 | 26,0 |
| **K- 07 40 25 49** | 14 mm | 58,6 | 29,3 |

*Vaatamata põhjalikule kontrollile ei saa me vigade esinemist välistada ning ei vastuta olemasolevate andmete eest.*