


# K-T-STECK VERS ISK DREH AG OR

Male branch tees with inner hex, swivel type, parallel male thread with O-ring

**HANSA FLEX**

## Omadused

Töörõhk	Max. 16 bar
Töötemperatuur	-20 °C to +80 °C
Materjal	Nikeldatud messing
Surverõngas	Hostaform
O-rõngas	NBR
Pingutusrõngas	Stainless steel

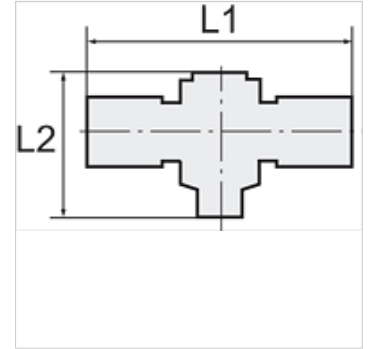

## Vihje

Lisaandmed saate soovi korral.

## Kirjeldus

The advanced version of our highly successful push-in fittings series manufactured in nickel-plated brass. Advantages of this new, optimised series: Much easier connection and disconnection of the hose, even with repeated mounting, can also be used for non-calibrated hoses, suitable for vacuum operation.

## Artikkel

Märgistus	Keere	vooliku välismise-Ø jaoks (mm)	L1 (mm)	L2 (mm)	SW
K- 07 40 26 31	M 5	4 mm	40,4	18,4	2 mm
K- 07 40 47 25	M 5	5 mm	47,6	18,8	2 mm
K- 07 40 26 32	M 5	6 mm	47,0	18,4	2 mm
K- 07 40 26 34	M 7	4 mm	40,4	18,5	3 mm
K- 07 40 26 35	M 7	6 mm	47,0	18,5	3 mm
K- 07 40 26 44	G 1/8	4 mm	42,6	24,9	3 mm
K- 07 40 47 27	G 1/8	5 mm	49,5	27,0	3 mm
K- 07 40 26 45	G 1/8	6 mm	46,0	24,9	3 mm
K- 07 40 26 46	G 1/8	8 mm	49,6	24,9	3 mm
K- 07 40 26 42	G 1/4	6 mm	49,0	29,4	4 mm
K- 07 40 26 43	G 1/4	8 mm	53,0	29,4	4 mm
K- 07 40 26 41	G 1/4	10 mm	62,8	29,4	4 mm
K- 07 40 47 26	G 1/4	12 mm	66,0	29,4	4 mm
K- 07 40 26 49	G 3/8	8 mm	57,0	35,6	5 mm
K- 07 40 26 47	G 3/8	10 mm	65,6	35,6	5 mm
K- 07 40 26 48	G 3/8	12 mm	69,6	35,6	5 mm
K- 07 40 26 39	G 1/2	12 mm	73,0	40,8	8 mm