

# K-STECKNIPPEL
push-in plug

## Omadused

| | |
|---|---|
| **Tööröhk** | Max. 16 bar |
| **Töötemperatuur** | -20 °C to +80 °C |
| **Materjal** | Nikeldatud messing |



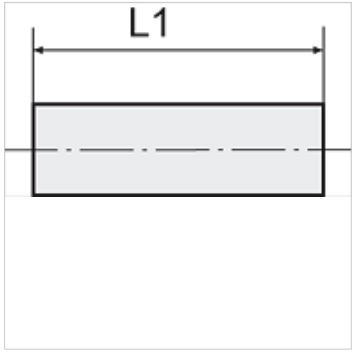


## Vihje

Lisaandmed saate soovi korral.

## Kirjeldus

The advanced version of our highly successful push-in fittings series manufactured in nickel-plated brass. Advantages of this new, optimised series: Much easier connection and disconnection of the hose, even with repeated mounting, can also be used for non-calibrated hoses, suitable for vacuum operation.

## Artikkel

| Märgistus | vooliku välimise-Ø jaoks (mm) | L1 (mm) |
|---|---|---|
| **K- 07 40 47 53** | 4 mm | 34,0 |
| **K- 07 40 47 54** | 5 mm | 34,0 |
| **K- 07 40 47 55** | 6 mm | 37,5 |
| **K- 07 40 47 56** | 8 mm | 37,5 |
| **K- 07 40 47 57** | 10 mm | 45,0 |
| **K- 07 40 47 58** | 12 mm | 48,0 |
| **K- 07 40 47 59** | 14 mm | 58,0 |

*Vaatamata põhjalikule kontrollile ei saa me vigade esinemist välistada ning ei vastuta olemasolevate andmete eest.*