


# K-L-RINGSTUECK1

## L-ring nipples

### Omadused

|                |                    |
|----------------|--------------------|
| Töörõhk        | Max. 16 bar        |
| Töötemperatuur | -20 °C to +70°C    |
| Materjal       | Nikeldatud messing |
| Surverõngas    | Hostaform          |
| Pingutusrõngas | Stainless steel    |

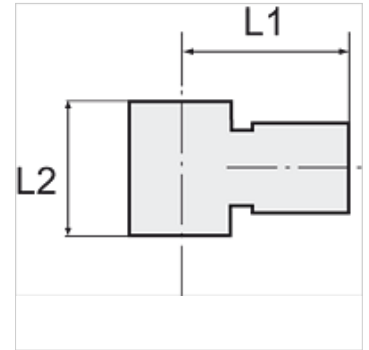

### Vihje

Lisaandmed saate soovi korral.

### Kirjeldus

The advanced version of our highly successful push-in fittings series manufactured in nickel-plated brass. Advantages of this new, optimised series: Much easier connection and disconnection of the hose, even with repeated mounting, can also be used for non-calibrated hoses, suitable for vacuum operation.

### Artikkel

| Märgistus      | Banjo poltidele | vooliku välimise-Ø jaoks (mm) | L1 (mm) | L2 (mm) |
|----------------|-----------------|-------------------------------|---------|---------|
| K- 07 40 26 82 | M 5             | 4 mm                          | 18,0    | 9,0     |
| K- 07 40 26 87 | G 1/8           | 4 mm                          | 20,5    | 15,0    |
| K- 07 40 26 88 | G 1/8           | 6 mm                          | 23,0    | 15,0    |
| K- 07 40 26 89 | G 1/8           | 8 mm                          | 24,5    | 15,0    |
| K- 07 40 26 85 | G 1/4           | 6 mm                          | 24,0    | 17,0    |
| K- 07 40 26 86 | G 1/4           | 8 mm                          | 26,0    | 17,0    |
| K- 07 40 26 83 | G 1/4           | 10 mm                         | 27,0    | 17,0    |
| K- 07 40 26 84 | G 1/4           | 12 mm                         | 28,0    | 17,0    |
| K- 07 40 26 92 | G 3/8           | 8 mm                          | 27,0    | 20,0    |
| K- 07 40 26 90 | G 3/8           | 10 mm                         | 28,0    | 20,0    |
| K- 07 40 26 91 | G 3/8           | 12 mm                         | 29,0    | 20,0    |