K-STECKVERSCHR AGR-K SK BESCH


Male connectors, conical male thread, coated with outer hex

HANSA FLEX

Omadused

Tööröhk	Max. 16 bar
Töötemperatuur	-20 °C to +150 °C
Materjal	Nikeldatud messing
Surverõngas	Nickel-plated brass
Pingutusrõngas	Stainless steel



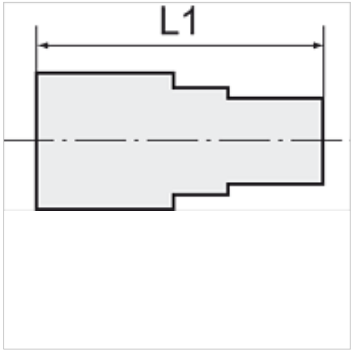

Vihje

Lisaandmed saate soovi korral.

Kirjeldus

Push-in fittings, manufactured entirely in nickel-plated brass. All parts with a parallel thread are supplied with an FPM O-ring.
All parts with conical threads are coated with preCOTE 5 dispersion, all fittings in this series can thus also be used at high temperatures (medium compressed air).

Artikkel

Märgistus	Keere	vooliku välimise-Ø jaoks (mm)	L1 (mm)	SW
K- 07 40 27 26	R 1/8	4 mm	22,5	10 mm
K- 07 40 27 27	R 1/8	6 mm	24,5	11 mm
K- 07 40 27 28	R 1/8	8 mm	27,5	13 mm
K- 07 40 47 62	R 1/4	4 mm	22,5	14 mm
K- 07 40 27 24	R 1/4	6 mm	24,5	14 mm
K- 07 40 27 25	R 1/4	8 mm	27,5	13 mm
K- 07 40 27 23	R 1/4	10 mm	32,5	16 mm
K- 07 40 47 61	R 1/4	12 mm	32,5	17 mm
K- 07 40 27 30	R 3/8	8 mm	28,0	17 mm
K- 07 40 27 29	R 3/8	10 mm	32,5	17 mm
K- 07 40 47 63	R 3/8	12 mm	30,5	17 mm
K- 07 40 47 60	R 1/2	12 mm	33,0	22 mm

Vaatamata põhjalikule kontrollile ei saa me vigade esinemist välistada ning ei vastuta olemasolevate andmete eest.