


# K-L-STECK VB 10BAR

Union elbows (pressure max. 10 bar)

**HANSA FLEX**

## Omadused

Töörõhk	Max. 10 bar
Rakendusvaldkond	Air, vacuum
soovitatud voolikud	PU or PA (nylon)
Vahendid	Compressed air and all gases or liquids that are compatible with the materials
Temperatuuri ulatus	-20 °C to +80 °C
Materjal	Plastic, Nickel plated brass
Surverõngas	Plastic

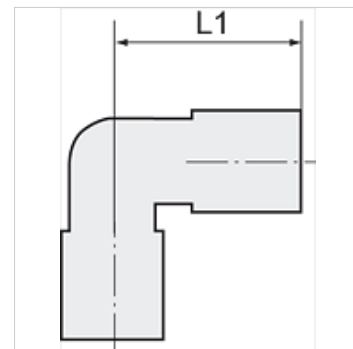

## Vihje

Lisaandmed saate soovi korral.

## Kirjeldus

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

## Artikkel

Märgistus	vooliku välimise-Ø jaoks (mm)	L1 (mm)
K- 07 40 03 50	4 mm	17,5
K- 07 40 03 51	6 mm	18,7
K- 07 40 03 52	8 mm	22,4
K- 07 40 03 53	10 mm	27,2
K- 07 40 03 54	12 mm	28,9
K- 07 40 41 38	14 mm	29,8
K- 07 40 03 55	16 mm	30,8