


# K-X-STECKVERBINDUNG

X-unions

**HANSA FLEX**

## Omadused

|                     |  |
|---------------------|--|
| Töörõhk             | Max. 15 bar, coarse vacuum   |
| Rakendusvaldkond    | Air, vacuum  |
| soovitatud voolikud | PU or PA (nylon)   |
| Vahendid            | Compressed air and all gases or liquids that are compatible with the materials |
| Temperatuuri ulatus | -20 °C to +80 °C   |
| Materjal            | Plastic, Nickel plated brass   |
| Surverõngas         | Plastic  |

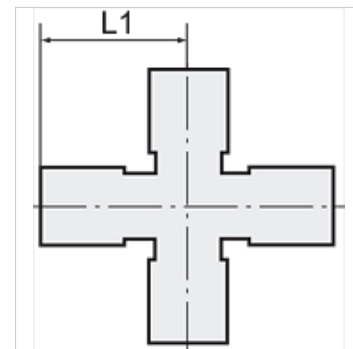

## Vihje

Lisaandmed saate soovi korral.

## Kirjeldus

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

## Artikkel

| Märgistus      | vooliku välimise-Ø jaoks (mm) | L1<br>(mm) |
|----------------|-------------------------------|------------|
| K- 07 40 03 70 | 4 mm                          | 17,5       |
| K- 07 40 03 71 | 6 mm                          | 19,0       |
| K- 07 40 03 72 | 8 mm                          | 22,8       |
| K- 07 40 03 73 | 10 mm                         | 27,9       |
| K- 07 40 03 74 | 12 mm                         | 29,3       |