


# K-Y-STECK VB 10 BAR

Y unions (pressure max. 10 bar)

**HANSA FLEX**

## Omadused

|                     |  |
|---------------------|--|
| Töörõhk             | Max. 10 bar  |
| Rakendusvaldkond    | Air, vacuum  |
| soovitatud voolikud | PU or PA (nylon)   |
| Vahendid            | Compressed air and all gases or liquids that are compatible with the materials |
| Temperatuuri ulatus | -20 °C to +80 °C   |
| Materjal            | Plastic, Nickel plated brass   |
| Surverõngas         | Plastic  |

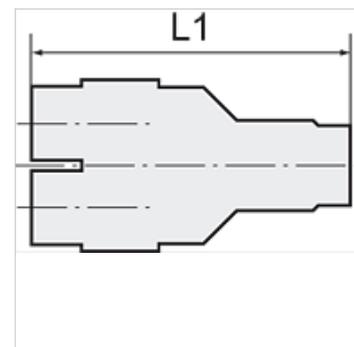

## Vihje

Lisaandmed saate soovi korral.

## Kirjeldus

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

## Artikkel

| Märgistus      | vooliku välimise-Ø jaoks (mm) | L1 (mm) |
|----------------|-------------------------------|---------|
| K- 07 40 03 75 | 4 mm                          | 35,5    |
| K- 07 40 03 76 | 6 mm                          | 36,5    |
| K- 07 40 03 77 | 8 mm                          | 39,8    |
| K- 07 40 03 78 | 10 mm                         | 48,9    |
| K- 07 40 03 79 | 12 mm                         | 52,6    |
| K- 07 40 41 49 | 14 mm                         | 54,6    |
| K- 07 40 03 80 | 16 mm                         | 56,6    |