


# K-Y-STECK VB 10 BAR

Y unions (pressure max. 10 bar)

**HANSA FLEX**

## Omadused

Töörõhk	Max. 10 bar
Rakendusvaldkond	Air, vacuum
soovitatud voolikud	PU or PA (nylon)
Vahendid	Compressed air and all gases or liquids that are compatible with the materials
Temperatuuri ulatus	-20 °C to +80 °C
Materjal	Plastic, Nickel plated brass
Surverõngas	Plastic

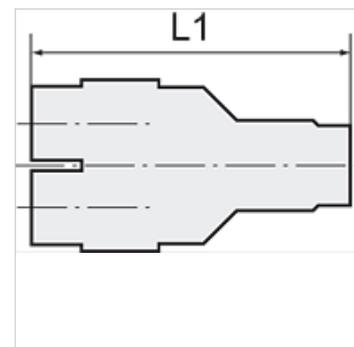

## Vihje

Lisaandmed saate soovi korral.

## Kirjeldus

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

## Artikkel

Märgistus	vooliku välimise-Ø jaoks (mm)	L1 (mm)
K- 07 40 03 75	4 mm	35,5
K- 07 40 03 76	6 mm	36,5
K- 07 40 03 77	8 mm	39,8
K- 07 40 03 78	10 mm	48,9
K- 07 40 03 79	12 mm	52,6
K- 07 40 41 49	14 mm	54,6
K- 07 40 03 80	16 mm	56,6