


K-STECKVERBINDU 2

Straight push-in connector

HANSA FLEX

Omadused

| | |
|----------------|---------------------|
| Töörõhk | Max. 16 bar |
| Töötemperatuur | -20 °C to +150 °C |
| Materjal | Nikeldatud messing |
| Surverõngas | Nickel-plated brass |
| Pingutusrõngas | Stainless steel |

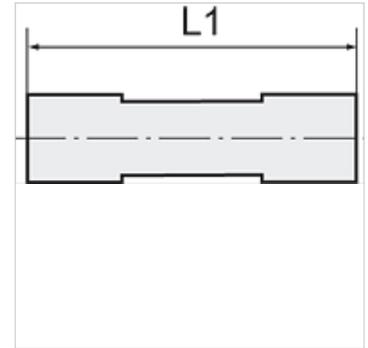

Vihje

Lisaandmed saate soovi korral.

Kirjeldus

Push-in fittings, manufactured entirely in nickel-plated brass. All parts with a parallel thread are supplied with an FPM O-ring. All parts with conical threads are coated with preCOTE 5 dispersion, all fittings in this series can thus also be used at high temperatures (medium compressed air).

Artikkel

| Märgistus | vooliku välimise-Ø jaoks (mm) | L1 (mm) |
|----------------|-------------------------------|------------|
| K- 07 40 27 49 | 4 mm | 31,0 |
| K- 07 40 27 50 | 6 mm | 33,0 |
| K- 07 40 27 51 | 8 mm | 37,0 |
| K- 07 40 27 52 | 10 mm | 39,0 |
| K- 07 40 47 74 | 12 mm | 43,0 |
| K- 07 40 40 91 | 14 mm | 47,5 |