


K-T-STECK VERS ASK DREH AG OR

Male branch tees with outer hex, swivel type, parallel male thread with O-ring

HANSA FLEX

Omadused

| | |
|----------------|---------------------|
| Töörõhk | Max. 16 bar |
| Töötemperatuur | -20 °C to +150 °C |
| Materjal | Nikeldatud messing |
| Surverõngas | Nickel-plated brass |
| O-rõngas | FKM (FPM) |
| Pingutusrõngas | Stainless steel |

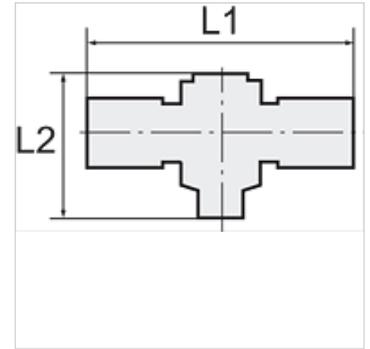

Vihje

Lisaandmed saate soovi korral.

Kirjeldus

Push-in fittings, manufactured entirely in nickel-plated brass. All parts with a parallel thread are supplied with an FPM O-ring. All parts with conical threads are coated with preCOTE 5 dispersion, all fittings in this series can thus also be used at high temperatures (medium compressed air).

Artikkel

| Märgistus | Keere | vooliku välimise-Ø jaoks (mm) | L1 (mm) | L2 (mm) | SW |
|----------------|-------|-------------------------------|------------|------------|-------|
| K- 07 40 28 04 | G 1/8 | 4 mm | 42,0 | 28,0 | 14 mm |
| K- 07 40 28 05 | G 1/8 | 6 mm | 46,0 | 28,0 | 14 mm |
| K- 07 40 28 03 | G 1/4 | 6 mm | 48,0 | 33,0 | 17 mm |