K-T-STECK VERS ASK DREH AG OR


Male branch tees with outer hex, swivel type, parallel male thread with O-ring

HANSA-FLEX

Omadused

Tööröhk	Max. 16 bar
Töötemperatuur	-20 °C to +150 °C
Materjal	Nikeldatud messing
Surverõngas	Nickel-plated brass
O-rõngas	FKM (FPM)
Pingutusrõngas	Stainless steel



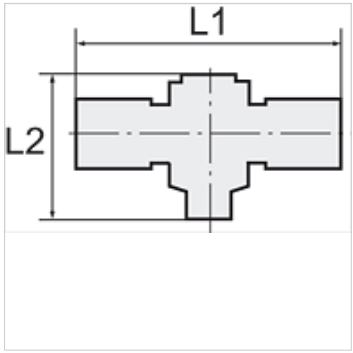

Vihje

Lisaandmed saate soovi korral.

Kirjeldus

Push-in fittings, manufactured entirely in nickel-plated brass. All parts with a parallel thread are supplied with an FPM O-ring.
All parts with conical threads are coated with preCOTE 5 dispersion, all fittings in this series can thus also be used at high temperatures (medium compressed air).

Artikkel

Märgistus	Keere	vooliku välimise-Ø jaoks (mm)	L1 (mm)	L2 (mm)	SW
K- 07 40 28 04	G 1/8	4 mm	42,0	28,0	14 mm
K- 07 40 28 05	G 1/8	6 mm	46,0	28,0	14 mm
K- 07 40 28 03	G 1/4	6 mm	48,0	33,0	17 mm

Vaatamata põhjalikule kontrollile ei saa me vigade esinemist välistada ning ei vastuta olemasolevate andmete eest.