


# K-DRG PNEU FERNGEST MULTIFIX

Pressure regulators with pneumatic remote control

**HANSA FLEX**

## Omadused

<b>Sisendrõhk</b>	Max. 16 bar
<b>Väljundrõhk</b>	corresponds to the set pressure of the pilot pressure regulator
<b>Aine temperatuur</b>	max. 60 °C
<b>Keskonnatemperatuur</b>	Max. 60 °C
<b>Tihendusmaterjal</b>	NBR
<b>Korpus</b>	Die-cast zinc, Aluminium for G 1 variant
<b>Läbivoolu väärtuse määrtmine</b>	At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar
<b>Juhtõhu ühendus</b>	G 1/8

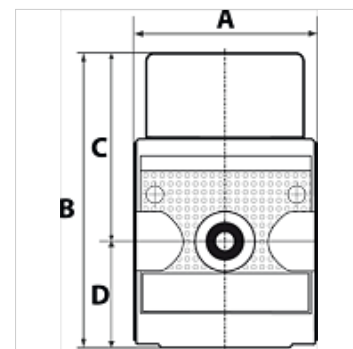

## Vihje

Lisaandmed saate soovi korral.

## Kirjeldus

Diaphragm pressure regulator, self-relieving, with pneumatic remote control. The pressure is set with a pilot pressure regulator (1:1 ratio). Either a standard or a precision pressure regulator can be used to regulate the pilot pressure.

## Artikkel

Märgistus	Keere	Läbivool (L/min)	A (mm)	B	C (mm)	D (mm)
K- 07 25 19 56	G 1/4	1800	48,0	75,0 mm	48,0	27,0
K- 07 25 19 57	G 1/2	4800	69,0	94,0 mm	59,0	35,0
K- 07 25 19 58	G 1	12500	100,0	112,0 mm	60,0	52,0

## Varuosad

K-HALTERBAUSATZ MULTIFIX	Holder
K-KOPPELPAKET MEHR	Coupling packet
K-VERSCHLEI-SATZ MULTIFIX	Set of wearing parts »multifix«