



K-DRV SCHLITZSCHR DREH BESCH

Unidirectional flow control valves with outgoing air restriction, adjustable, angled, swivel type, parallel male thread with O-ring

HANSA FLEX

Omadused

| | |
|---------------------|--|
| Töörõhk | Max. 10 bar |
| Rakendusvaldkond | Air, vacuum |
| soovitatud voolikud | PU or PA (nylon) |
| Vahendid | Compressed air and all gases or liquids that are compatible with the materials |
| Temperatuuri ulatus | -20 °C to +80 °C |
| Tihenduspid | Parallel version: O-ring in housing, Conical version: thread coating |
| Materjal | Plastic, Nickel plated brass |
| Surverõngas | Plastic |

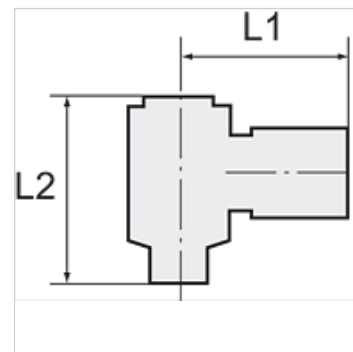

Vihje

Lisaandmed saate soovi korral.

Kirjeldus

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

Artikkel

| Märgistus | Keere | vooliku välimise-Ø jaoks (mm) | L1 (mm) | L2 min (mm) | SW |
|----------------|-------|-------------------------------|---------|-------------|-------|
| K- 07 40 46 33 | M 5 | 4 mm | 20,0 | 23,0 | 8 mm |
| K- 07 40 46 34 | M 5 | 6 mm | 21,5 | 23,0 | 8 mm |
| K- 07 40 46 42 | G 1/8 | 4 mm | 23,0 | 31,5 | 12 mm |
| K- 07 40 46 43 | G 1/8 | 6 mm | 23,0 | 31,5 | 12 mm |
| K- 07 40 46 44 | G 1/8 | 8 mm | 26,5 | 31,5 | 12 mm |
| K- 07 40 46 39 | G 1/4 | 4 mm | 25,0 | 38,3 | 14 mm |
| K- 07 40 46 40 | G 1/4 | 6 mm | 25,0 | 38,3 | 14 mm |
| K- 07 40 46 41 | G 1/4 | 8 mm | 29,0 | 38,3 | 14 mm |
| K- 07 40 46 38 | G 1/4 | 10 mm | 31,0 | 38,3 | 14 mm |
| K- 07 40 46 47 | G 3/8 | 6 mm | 27,0 | 43,0 | 19 mm |
| K- 07 40 46 48 | G 3/8 | 8 mm | 30,5 | 43,0 | 19 mm |
| K- 07 40 46 45 | G 3/8 | 10 mm | 32,0 | 43,0 | 19 mm |
| K- 07 40 46 46 | G 3/8 | 12 mm | 35,0 | 43,0 | 19 mm |
| K- 07 40 46 37 | G 1/2 | 8 mm | 33,0 | 49,0 | 24 mm |
| K- 07 40 46 35 | G 1/2 | 10 mm | 34,5 | 49,0 | 24 mm |
| K- 07 40 46 36 | G 1/2 | 12 mm | 36,5 | 49,0 | 24 mm |