


# K-VERBINDER 4

Unions

**HANSA FLEX**

## Omadused

Töörõhk	Max. 16 bar (at +20 °C)
Töötemperatuur	-20 °C to +70 °C
Materjal	Nikeldatud messing
Surverõngas	Hostaform (black nickel-plated for Ø 10, 12)
O-rõngas	NBR, siliconefree
Pingutustangid	Stainless steel AISI 316

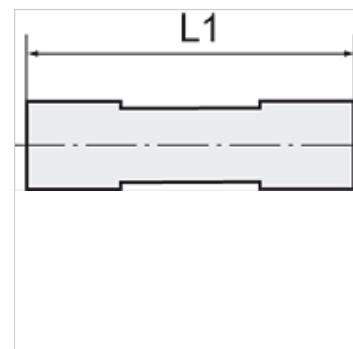

## Vihje

Lisaandmed saate soovi korral.

## Kirjeldus

Economy yet very high-quality series of push-in fittings made of nickel-plated brass. Compact, space-saving, lightweight design. An O-ring in the fillet at the end of the thread guarantees a tight connection for all male thread parts, even on rough surfaces.

## Artikkel

Märgistus	vooliku välimise-Ø jaoks (mm)	L1 (mm)
K- 07 40 29 42	4 mm	31,0
K- 07 40 29 43	6 mm	33,5
K- 07 40 29 44	8 mm	38,0
K- 07 40 29 45	10 mm	39,5
K- 07 40 29 46	12 mm	43,0