



# K-T-STECK VERS DRE AG OR VA

Male branch tees, swivel type, parallel male thread with O-ring

**HANSA FLEX**

## Omadused

<b>Töörõhk, pulseeriv</b>	Max. 10 bar
<b>Surve</b>	Max. 15 bar (depending on pipe quality)
<b>sobiv materjal</b>	PVDF, PTFE, stainless steel, PA, PU
<b>Tavaline</b>	G thread acc. to DIN EN ISO 228-1, with O-Ring
<b>Keskonnatemperatuur</b>	-20 °C to max. +150 °C (depending on pipe quality and diameter)
<b>Materjal</b>	Roostevaba teras 1.4404
<b>Tihendusmaterjal</b>	FKM

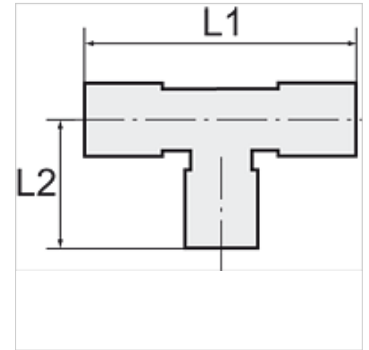

## Vihje

Lisaandmed saate soovi korral.

## Kirjeldus

For use with aggressive media and in areas with corrosive outside influences, in the food processing industry and in hygienic and sanitary applications.

## Artikkel

Märgistus	Keere	vooliku välimise-Ø jaoks (mm)	L1 (mm)	L2 (mm)	SW
K- 07 40 46 81	M 5	4 mm	34,0	18,0	9 mm
K- 07 40 24 52	G 1/8	4 mm	34,0	20,0	13 mm
K- 07 40 24 53	G 1/8	6 mm	42,0	22,5	13 mm
K- 07 40 24 54	G 1/8	8 mm	43,0	22,5	13 mm
K- 07 40 24 50	G 1/4	6 mm	42,0	24,5	16 mm
K- 07 40 24 51	G 1/4	8 mm	43,0	24,5	16 mm
K- 07 40 24 49	G 1/4	10 mm	50,0	25,5	16 mm
K- 07 40 24 55	G 3/8	10 mm	50,0	27,0	21 mm