



# K-XV AG R

Double nipples, conical male thread

**HANSA FLEX**

## Omadused

|                      |                                 |
|----------------------|---------------------------------|
| Töörõhk              | 10 bar                          |
| Aine temperatuur     | max. +90 °C                     |
| Keskkonnatemperatuur | Max. +90 °C                     |
| Materjal             | Brass with a bare metal surface |

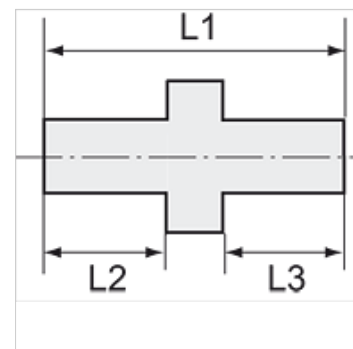

## Vihje

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.  
Lisandmed saate soovi korral.

## Lisateave

Further types and dimensions on request.

## Artikkel

| Märgistus      | Keere 1 | Keere 2 | L1<br>(mm) | L2<br>(mm) | L3<br>(mm) | SW    |
|----------------|---------|---------|------------|------------|------------|-------|
| K- 07 40 44 60 | R 1/8   | R 1/8   | 21,0       | 8,0        | 8,0        | 10 mm |
| K- 07 40 44 61 | R 1/8   | R 1/4   | 24,5       | 8,0        | 11,5       | 14 mm |
| K- 07 40 44 62 | R 1/8   | R 3/8   | 26,0       | 8,0        | 13,0       | 17 mm |
| K- 07 40 00 26 | R 1/4   | R 1/4   | 30,0       | 12,0       | 12,0       | 14 mm |
| K- 07 40 44 66 | R 1/4   | R 3/8   | 29,5       | 11,5       | 13,0       | 17 mm |
| K- 07 40 44 67 | R 1/4   | R 1/2   | 32,5       | 11,5       | 15,5       | 22 mm |
| K- 07 40 00 27 | R 3/8   | R 3/8   | 38,0       | 16,0       | 16,0       | 22 mm |
| K- 07 40 44 70 | R 3/8   | R 1/2   | 34,0       | 15,5       | 13,0       | 22 mm |
| K- 07 40 44 71 | R 3/8   | R 3/4   | 36,5       | 13,0       | 17,5       | 27 mm |
| K- 07 40 00 28 | R 1/2   | R 1/2   | 38,0       | 16,0       | 16,0       | 27 mm |
| K- 07 40 44 74 | R 1/2   | R 3/4   | 39,0       | 17,5       | 15,5       | 27 mm |
| K- 07 40 44 75 | R 1/2   | R 1     | 42,5       | 20,0       | 15,5       | 34 mm |
| K- 07 40 00 29 | R 3/4   | R 3/4   | 51,5       | 22,0       | 22,0       | 32 mm |
| K- 07 40 44 78 | R 3/4   | R 1     | 44,5       | 20,0       | 17,5       | 34 mm |
| K- 07 40 00 30 | R 1     | R 1     | 47,0       | 19,5       | 19,5       | 41 mm |