


### Omadused

<b>Tüüp</b>	Ohutusventiil
<b>Töörõhk</b>	max 350 baari
<b>Lisatunnus</b>	TÜV-i loaga
<b>Materjal</b>	Tihend: NBR
<b>Ühendus</b>	rõhusalvestile, M33 × 2

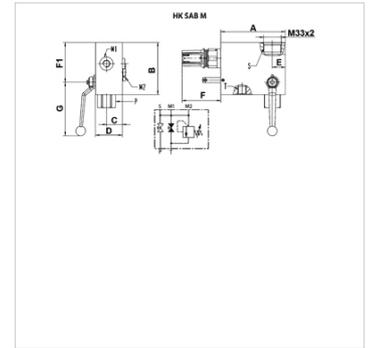

### Vihje

Ohutusventiil on tugevalt paigaldatud, vastava mahuti juurde määramisel jälgige maksimaalrõhku!

### Kirjeldus

The Safety Unit serves as a device for the protection, shut off and discharge of hydro accumulators. It is designed according to PED 2014/68/EU, article 3 paragraph 3, manufactured and considered to the European safety regulations for the operation of hydraulic accumulators. The discharge of the accumulator is manually by a ball valve or a relief valve.

Vedelike viskoossus peab jääma järgmiste piiride vahele:

min 10 mm<sup>2</sup>/s, max 380 mm<sup>2</sup>/s

### Artikkel

Märgistus	p max. (bar)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	F1 (mm)	G (mm)	M1	M2	P	T	Kaal (kg)
HK SAB 10 M 100 N	100	120	98	29	50	24	73	75	101	1/4"	1/4"	1/2"	1/2"	4,2
HK SAB 10 M 200 N	200	120	98	29	50	24	73	75	101	1/4"	1/4"	1/2"	1/2"	4,2
HK SAB 10 M 210 N	210	120	98	29	50	24	73	75	101	1/4"	1/4"	1/2"	1/2"	4,2
HK SAB 10 M 250 N	250	120	98	29	50	24	73	75	101	1/4"	1/4"	1/2"	1/2"	4,2
HK SAB 10 M 330 N	330	120	98	29	50	24	73	75	101	1/4"	1/4"	1/2"	1/2"	4,2
HK SAB 20 M 330 N	330	98	120	39	71	25	73	90	184	1/2"	1/4"	1"	3/4"	6,6

### Lisatarvikud

HK AS	Ohutus- ja lukustustakisti turvaadapter
HK MSM	Membraanmahuti C vastumutter

### on järgnevate toodete lisatarvikud

HK OLM A	Membraanmahuti ühendus A
HK OLM C	Membraanmahuti ühendus C
HK BLAK	Mahuti