



UEM AJ

Écrou-raccord AJ

HANSA FLEX

Caractéristiques

| | |
|-----------------------|----------------------|
| Raccord 1 | filet int. UN/UNF |
| Construction | Écrou-raccord |
| Norme | ISO 8434-2 |
| Matériau | Acier |
| Traitement de surface | revêtement galvanisé |

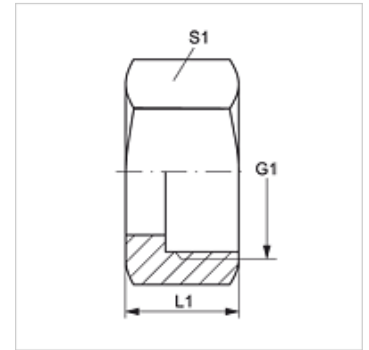

Article

| Désignation | pour Ø ext. du tube en (mm) | G1 | S1 | L1 (mm) |
|-------------|-----------------------------|----------------|----|---------|
| UEM AJ 03 | - | 3/8" -24 UNF | 11 | 16,0 |
| UEM AJ 04 | - | 7/16" -20 UNF | 14 | 16,0 |
| UEM AJ 05 | - | 1/2" -20 UNF | 17 | 17,0 |
| UEM AJ 06 | - | 9/16" -18 UNF | 19 | 18,0 |
| UEM AJ 08 | - | 3/4" -16 UNF | 22 | 21,0 |
| UEM AJ 10 | - | 7/8" -14 UNF | 27 | 25,0 |
| UEM AJ 12 | - | 1 1/16" -12 UN | 32 | 26,0 |
| UEM AJ 14 | - | 1 3/16" -12 UN | 36 | 27,5 |
| UEM AJ M 20 | 20 | 1 1/16" -12 UN | 32 | 26,2 |
| UEM AJ 16 | - | 1 5/16" -12 UN | 41 | 28,0 |
| UEM AJ 20 | - | 1 5/8" -12 UN | 50 | 31,0 |
| UEM AJ 24 | - | 1 7/8" -12 UN | 60 | 36,0 |
| UEM AJ 32 | - | 2 1/2" -12 UN | 70 | 45,0 |

Gamme de produits

UEM AJ VA Écrou-raccord AJ, Acier inoxydable