


### Caractéristiques

Raccord 1	Filetage femelle BSP
Étanchéité 1	Cône extérieur 60°
Raccord 2	filetage femelle BSP
Construction	Raccords
Conception	Coude 90°
Matériau	Acier
Traitement de surface	revêtement galvanisé

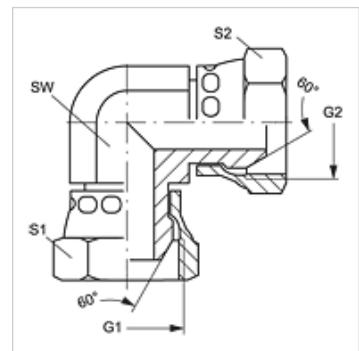

### Article

Désignation	G1 + G2	SW (mm)	S1 + S2 (mm)
<b>W90 AB 02</b>	G 1/8" -28	11	14
<b>W90 AB 04</b>	G 1/4" -19	14	19
<b>W90 AB 06</b>	G 3/8" -19	19	22
<b>W90 AB 08</b>	G 1/2" -14	22	27
<b>W90 AB 10</b>	G 5/8" -14	25	27
<b>W90 AB 12</b>	G 3/4" -14	27	32
<b>W90 AB 16</b>	G 1" -11	33	41
<b>W90 AB 20</b>	G 1 1/4" -11	41	50
<b>W90 AB 24</b>	G 1 1/2" -11	48	60
<b>W90 AB 32</b>	G 2" -11	67	70

SW, S1, S2 = largeur de clé

### Gamme de produits

**W90 AB VA** Adaptateur femelle, coude 90°, Acier inoxydable