


### Caractéristiques

Raccord 1	Filetage extérieur BSP cylindrique
Étanchéité 1	Forme A
Construction	Vis de fermeture à six pans extérieurs
Conception	droit
Norme	DIN 910
Matériaux	Acier
Traitement de surface	revêtement galvanisé

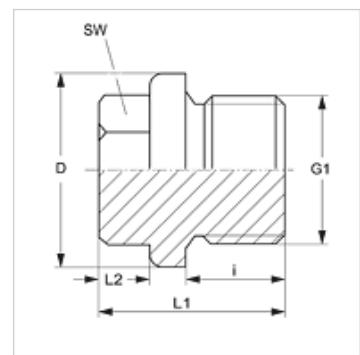

### Article

Désignation	G1	i (mm)	D (mm)	L1 (mm)	L2 (mm)	SW (mm)
<b>FHR 91-1/8</b>	G 1/8" -28	8	14	17	6	10
<b>FHR 91-1/4</b>	G 1/4" -19	12	18	21	6	13
<b>FHR 91-3/8</b>	G 3/8" -19	12	22	21	6	17
<b>FHR 91-1/2</b>	G 1/2" -14	14	26	26	8	19
<b>FHR 91-5/8</b>	G 5/8" -14	14	28	26	8	19
<b>FHR 91-3/4</b>	G 3/4" -14	16	32	30	10	24
<b>FHR 91-1</b>	G 1" -11	16	39	32	11	27
<b>FHR 91-1 1/4</b>	G 1 1/4" -11	16	49	33	12	30
<b>FHR 91-1 1/2</b>	G 1 1/2" -11	16	55	33	12	30