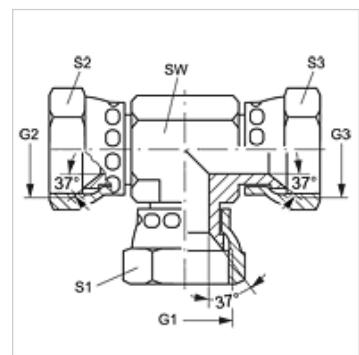


**Caractéristiques**

Raccord 1 - 3	filetage femelle UN/UNF
Étanchéité 1 - 3	Cône intérieur 74°
Construction	Corps
Conception	Forme T
Matériau	Acier
Traitement de surface	revêtement galvanisé

**Article**

Désignation	G1 - G3	SW (mm)	S1 - S3 (mm)
<b>T AJ 04</b>	7/16" -20 UNF	11	14
<b>T AJ 05</b>	1/2" -20 UNF	13	17
<b>T AJ 06</b>	9/16" -18 UNF	14	18
<b>T AJ 08</b>	3/4" -16 UNF	19	22
<b>T AJ 10</b>	7/8" -14 UNF	19	25
<b>T AJ 12</b>	1 1/16" -12 UN	27	32
<b>T AJ 16</b>	1 5/16" -12 UN	30	41
<b>T AJ 20</b>	1 5/8" -12 UN	41	50

SW, S1, S2 = largeur de clé