

# HK V7 467


Vanne de commutation 4/3 voies

**HANSA FLEX**

## Caractéristiques

**Fabrication** Type A - position centrale ouverte  
Type C - position centrale fermée

**Matériau** Boîtier : Fonte, pièces internes en acier

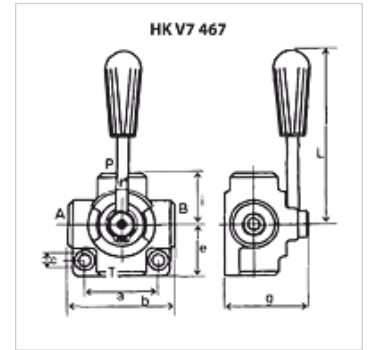

## Remarque

Rotary slide valves can be pressurised from all sides and are designed to have less internal leakage

## Article

| Désignation   | Pression max.<br>(bar) | Raccords | Q max.<br>(L/min) | a<br>(mm) | b<br>(mm) | c<br>(mm) | e<br>(mm) | g<br>(mm) | i<br>(mm) | L<br>(mm) | Poids<br>(kg) |
|---------------|------------------------|----------|-------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|---------------|
| HK V7 467 A06 | 250                    | 3/8"     | 35                | 54        | 77        | 8,5       | 38,5      | 71        | 38,5      | 110       | 1,28          |
| HK V7 467 A08 | 250                    | 1/2"     | 50                | 68        | 90        | 8,5       | 45,0      | 80        | 45,0      | 120       | 1,90          |
| HK V7 467 A12 | 220                    | 3/4"     | 90                | 74        | 95        | 8,5       | 47,5      | 90        | 47,5      | 125       | 2,60          |
| HK V7 467 C06 | 250                    | 3/8"     | 35                | 54        | 77        | 8,5       | 38,5      | 71        | 38,5      | 110       | 1,28          |
| HK V7 467 C08 | 250                    | 1/2"     | 50                | 68        | 90        | 8,5       | 45,0      | 80        | 45,0      | 120       | 1,90          |
| HK V7 467 C12 | 220                    | 3/4"     | 90                | 74        | 95        | 8,5       | 47,5      | 90        | 47,5      | 125       | 2,60          |