
K-INLINE-EJEKTTOREN VR

Inline ejectors »VR«, screw connection

Caractéristiques

Caractéristiques	Vacuum generator with high maximum vacuum level (85% vacuum) No moving parts, which means no wear and no maintenance ultra small footprint, suitable for confined spaces minimal air consumption \nlow noise
Application	by screwing / plugging into the distribution beam direct attachment to the suction pad for handling various workpieces
Boîtier	Aluminium eloxed (type VR)
Système de buses	Brass (type VR)
Raccord	Raccord embrochable



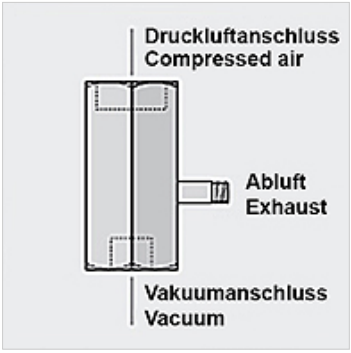

Remarque

Autres informations sur demande.

Description

For vacuum generation directly at the point of use. For direct installation between the suction pad and the compressed air supply. Purely pneumatic vacuum generator that operates on the Venturi principle. Compressed air enters the ejector and flows through a nozzle. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet. This air and the driving air leave the ejector and enter the atmosphere via the exhaust air outlet.

Article

Désignation	Taille de buse	Raccord d'échappement	Raccord air comprimé	Raccord aspiration	Niveau de vide	Consommation d'air aspiration (L/min)	Capacité d'aspiration maxi (L/min)	Longueur (mm)	Pression de service (bar)
K- 07 45 01 29	0,7	M 5 male	G 1/4 IG	G1/8 female	90 %	21,0	14,0	35,0	5,0
K- 07 45 01 30	0,9	M 5 male	G 1/4 IG	G1/8 female	89 %	36,0	21,0	35,0	5,0

En dépit du soin apporté aux vérifications, nous ne pouvons garantir une absence totale d'erreur et ne saurions être tenus responsables des indications contenues.