

K-SAUGPLATTENAUFHAENGUNG

Flexible suction pad mountings

Caractéristiques

Application	For handling of workpieces with sloping using large-area vacuum gripper Handling of large plates that can sag when lifting In combination with spring plungers to compensate height-differences and Uneveness
Caractéristiques	very good adaptation to oblique workpiece surfaces automatic reset in startposition vacuum-tight design with integrated protection against damage

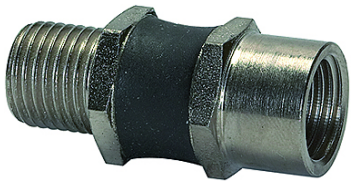

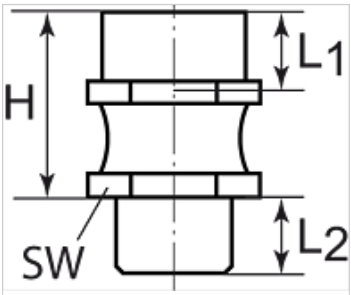

Remarque

Autres informations sur demande.

Description

Flexible suction pad mounting. By flexing in all directions, this mounting allows the suction pad to better adapt itself to sloping workpieces.

Article

Désignation	Filetage 1 intérieur	Filetage 2 extérieur	H (mm)	Matériau	L1 (mm)	L2 (mm)	Angle W (°)	Charge verticale (N/m2)	Moment fléchissant (N/m2)	SW (mm)
K- 07 45 01 47	G 1/4	M 10 x 1.25	27,0	Steel, rubber	10,5	8,0	12	500	8,0	17
K- 07 45 01 48	G 1/4	G 1/4	27,0	Steel, rubber	12,0	12,0	12	750	10,0	17

En dépit du soin apporté aux vérifications, nous ne pouvons garantir une absence totale d'erreur et ne saurions être tenus responsables des indications contenues.