

K-SAUGPLATTENAUFHAENGUNG


Flexible suction pad mountings

HANSA FLEX

Caractéristiques

Application For handling of workpieces with sloping using large-area vacuum gripper
Handling of large plates that can sag when lifting
In combination with spring plungers to compensate height-differences and Uneveness

Caractéristiques very good adaptation to oblique workpiece surfaces
automatic reset in startposition
vacuum-tight design with integrated protection against damage

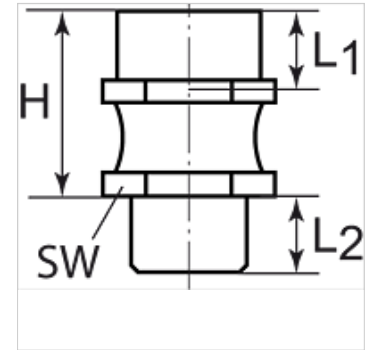

Remarque

Autres informations sur demande.

Description

Flexible suction pad mounting. By flexing in all directions, this mounting allows the suction pad to better adapt itself to sloping workpieces.

Article

Désignation	Filetage 1 intérieur	Filetage 2 extérieur	H (mm)	Matériau	L1 (mm)	L2 (mm)	Angle W (°)	Charge verticale (N/m ²)	Moment fléchissant (N/m ²)	SW (mm)
K- 07 45 01 47	G 1/4	M 10 x 1.25	27,0	Steel, rubber	10,5	8,0	12	500	8,0	17
K- 07 45 01 48	G 1/4	G 1/4	27,0	Steel, rubber	12,0	12,0	12	750	10,0	17